

Boiler manifolds KSV 125 - 160 kW for heating pump groups PrimoTherm



AFRISO Sp. z o.o.
Szałsza, ul. Kościelna 7, 42-677
Czekanów
www.afriso.pl

Customer Service Team
tel. 32 330 33 55, fax 32 330 33 51
zok@afriso.pl

WARNING!




The product may only be mounted, commissioned, operated, maintained, decommissioned and disposed of by qualified, specially trained staff. Changes or modifications made to the product by unauthorised persons may lead to malfunctions and are prohibited for safety reasons.

APPLICATION

Used in heating and cooling systems. Mounted between the heat/cool source and the system. Designed to distribute the medium to individual circuits using heating pump groups PrimoTherm.

DESCRIPTION OF THE DEVICE/SCOPE OF DELIVERY

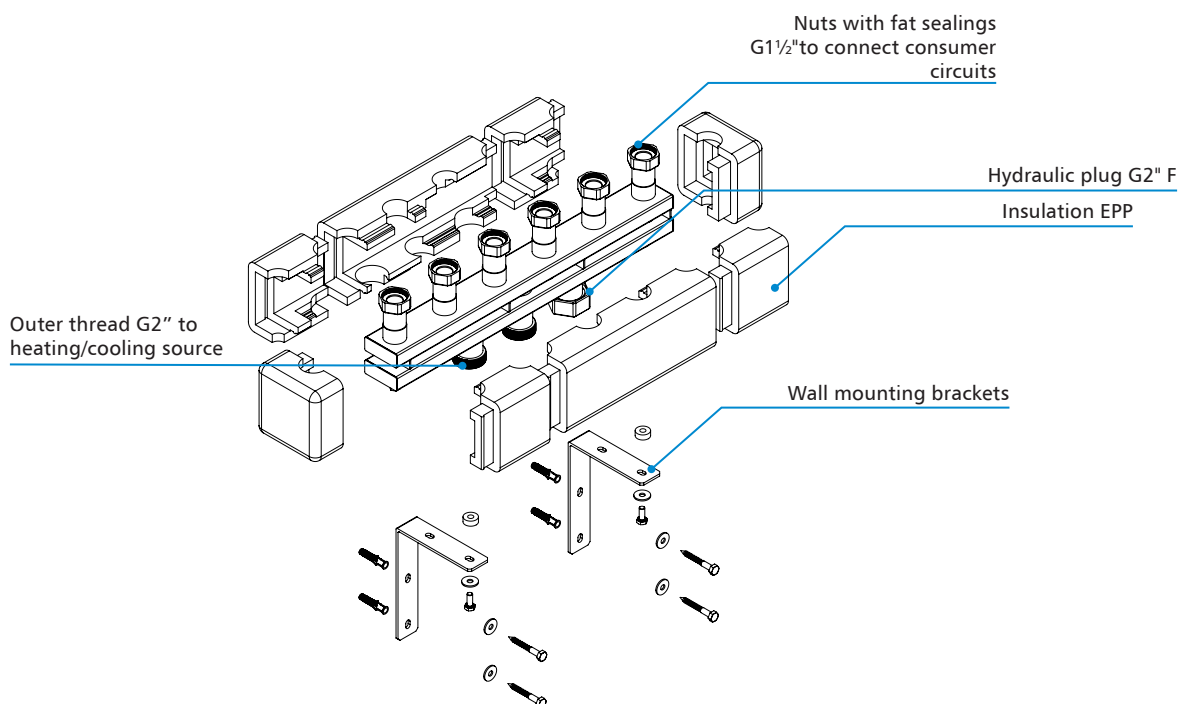

Boiler manifold KSV 125 - 160 kW should be connected to heating/cooling circuits accordingly to the markings on the connections: **red colour = supply, blue colour = return from the system/to heat or cool source**. Consumer circuits should be connected via flat sealings. However, sealings or suitable sealant, e.g. Teflon tape should be used to seal the connections of the heat/cool source circuit.

Any unused connection for the heating/cooling supply must be plugged with the hydraulic plug included in the delivery.

TECHNICAL DATA

Parameter	Value / description
Axis distance	125 mm
Nominal pressure	max 6 bar
Operating temperature	max 110°C
Flow	max 7 m ³ /h
Heating capacity	max 160 kW (with $\Delta T = 20^\circ\text{C}$)

MAINTENANCE

Boiler manifolds KSV 125 - 160 kW are maintenance-free.

DECOMMISSIONING, DISPOSAL

1. Dismount the product.
2. To protect the environment, this product must not be disposed of together with the normal household waste. Dispose of the product according to local directives and guidelines.

Boiler manifolds KSV 125 - 160 kW consist of materials that can be recycled.

WARRANTY

Product warranty in accordance with the general conditions of sale and delivery.

CUSTOMER SATISFACTION

Customer satisfaction is our prime objective. Please get in touch with us if you have any questions or problems concerning your product: zok@afriso.pl, tel. 32 330 33 55.